


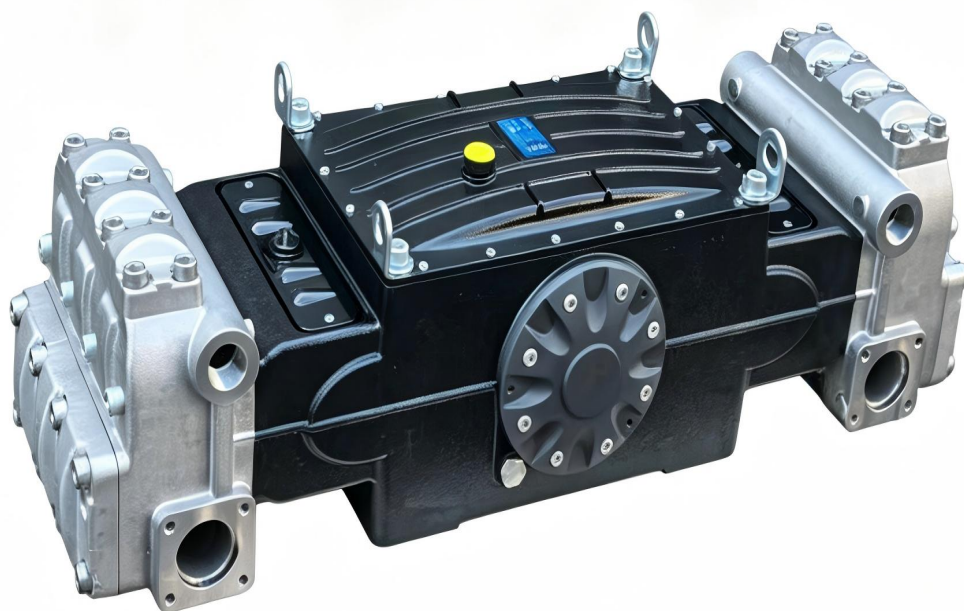

Base data

plunger pump Type

SEW55

Pressure

Pressure class

100 bar (1450PSI)

Pressure variable

Yes, with tools

Minimal pressure

/ bar (/ PSI)

Hydraulics

flow rate

558l/min (147.6USgal/min)

Pump revolution speed

Max. 560 rpm

Hydraulic power

103kW (140Hp)

Pump

Ceramic triplex plunger

Threaded connection

Input port

80mm

Output port

G1 1/4

D

Bore

55mm

Stroke

70mm

Pump minimum

100rpm

Motor type

/

Voltage and frequency

/

Others

Chassis

/.

Weight in kg

390 kg


Dimensions (L/W/H)

1149*587*332mm

Clear water, up to 60 °C (140 °F),
min. 1.8 bar (26 PSI) to max. 6 bar
(90 PSI) supply pressure

Medium

6-Cylinder Plunger Pump - Flow vs. Speed Characteristic

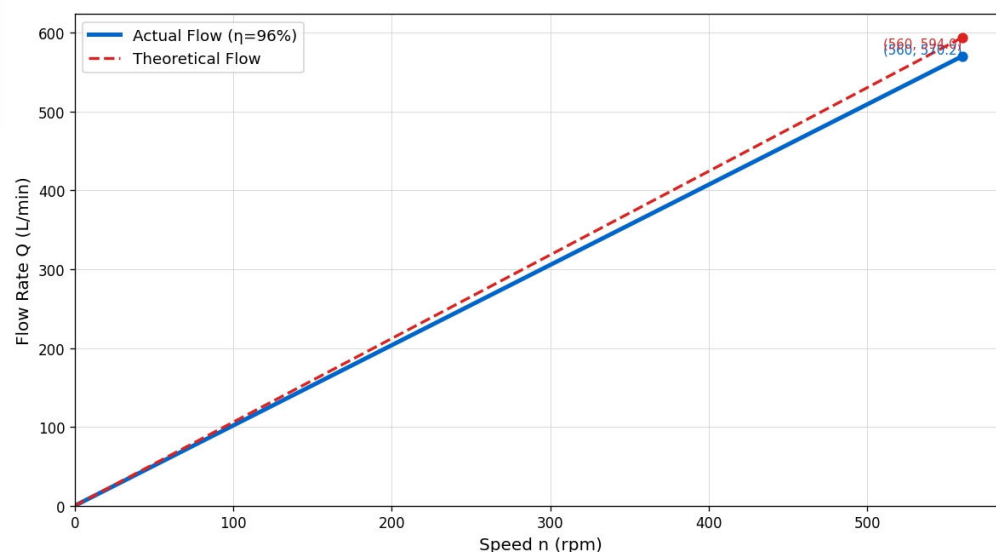

Suze tech .Ltd

Phone/whatsapp +86 18969639961
zhejiang china
info@kamjet.com www.kamjet.com

09/2025©CopyrightSuze tech edit.Subjecttomodification.